


## Totally Carpet Specs

<b>Style Name</b>	<b>Strident</b>
<b>Style Number</b>	<b>1033</b>
<b>Pattern Repeat</b>	<b>9.6W" X 38.5" L</b>
<b>Tufted Yarn Weight</b>	<b>46 oz</b>
<b>Gauge</b>	<b>1/10</b>
<b>Construction</b>	<b>Tip Sheared</b>
<b>Face Yarn</b>	<b>100% Solution Dyed Nylon</b>
<b>Yarn Spec</b>	<b>"Cortex" (Patent Pending) Twisted &amp; Heatset For High Performance</b>
<b>Tufts/sq in.</b>	<b>220 (Gauge x Stitch Rate x Tufts/Stitch)</b>
<b>Pile Height</b>	<b>0.187</b>
<b>Primary Backing</b>	<b>4 oz Woven Polypropylene</b>
<b>Secondary Backing</b>	<b>High Performance Backing System with 18x5 Lino ActionBac</b>
<b>Tile Backing</b>	<b>Vinyl composite with recycled content</b>
<b>Width Broadloom</b>	<b>12'</b>
<b>Tile Size</b>	<b>24" x 24"</b>
<b>Treatments</b>	<b>Commercial carpet soil protection &amp; static control</b>
<b>Post Installation Protection</b>	<b>Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.</b>
<b>Recommended Adhesive Broadloom</b>	<b>Totally Premium Broadloom Adhesive</b>
<b>Recommended Adhesive Tile</b>	<b>Totally Premium Tile Adhesive</b>
<b>Flammability</b>	<b>Passes Class 1 (ASTM E-648)</b>
<b>Electrostatic Propensity</b>	<b>Passes AATCC - 134 @ 3.5 KV or less</b>
<b>Dye Lot Size</b>	<b>Unlimited</b>
<b>Custom Colors &amp; Weight</b>	<b>Please Inquire</b>
<b>Origin</b>	<b>Made in USA</b>
<b>LEED</b>	<b>Contributes to Leed Credits</b>
<b>CRI</b>	<b>Green Label Plus</b>
<b>Warranty</b>	<b>Tile: limited lifetime warranty. Broadloom: 10 year limited warranty</b>

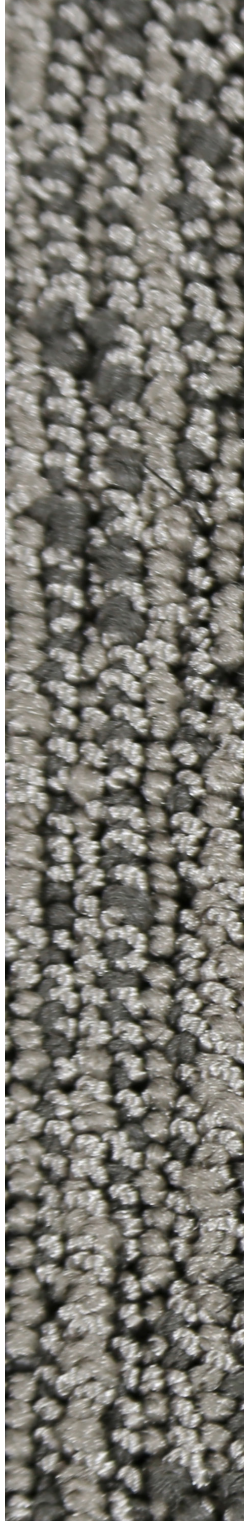

## Totally Carpet Specs

<b>Style Name</b>	<b>Strident Loop</b>
<b>Style Number</b>	<b>1034</b>
<b>Pattern Repeat</b>	<b>9.6W" X 38.5" L</b>
<b>Tufted Yarn Weight</b>	<b>46 oz</b>
<b>Gauge</b>	<b>1/10</b>
<b>Construction</b>	<b>Loop</b>
<b>Face Yarn</b>	<b>100% Solution Dyed Nylon</b>
<b>Yarn Spec</b>	<b>"Cortex" (Patent Pending) Twisted &amp; Heatset For High Performance</b>
<b>Tufts/sq in.</b>	<b>220 (Gauge x Stitch Rate x Tufts/Stitch)</b>
<b>Pile Height</b>	<b>0.218</b>
<b>Primary Backing</b>	<b>4 oz Woven Polypropylene</b>
<b>Secondary Backing</b>	<b>High Performance Backing System with 18x5 Lino ActionBac</b>
<b>Width Broadloom</b>	<b>12'</b>
<b>Treatments</b>	<b>Commercial carpet soil protection &amp; static control</b>
<b>Post Installation Protection</b>	<b>Plastic protection is prohibited. It causes discoloration and accelerated soiling. Craft paper, corrugated box material or masonite are recommended.</b>
<b>Recommended Adhesive Broadloom</b>	<b>Totally Premium Broadloom Adhesive</b>
<b>Flammability</b>	<b>Passes Class 1 (ASTM E-648)</b>
<b>Electrostatic Propensity</b>	<b>Passes AATCC - 134 @ 3.5 KV or less</b>
<b>Dye Lot Size</b>	<b>Unlimited</b>
<b>Custom Colors &amp; Weight</b>	<b>Please Inquire</b>
<b>Origin</b>	<b>Made in USA</b>
<b>LEED</b>	<b>Contributes to Leed Credits</b>
<b>CRI</b>	<b>Green Label Plus</b>
<b>Warranty</b>	<b>Broadloom: 10 year limited warranty</b>